


Image



**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant : Ian Zetterstrom Smith

Serial No.: 10/699,905

Filed: November 3, 2003

Title: TRIMMER

Docket No.: 36245

**LETTER**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Sir:

Enclosed is a certified copy of UK Patent Application No. 0225686.5; the priority of which has been claimed in the above-identified application.

Respectfully submitted,

PEARNE & GORDON LLP

By:

  
Jeffrey J. Sopko, Reg. No. 27676

1801 East 9th Street  
Suite 1200  
Cleveland, Ohio 44114-3108  
(216) 579-1700

November 19, 2003


I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date indicated below.

Jeffrey J. Sopko

Name of Attorney for Applicant(s)

November 19, 2003

Date

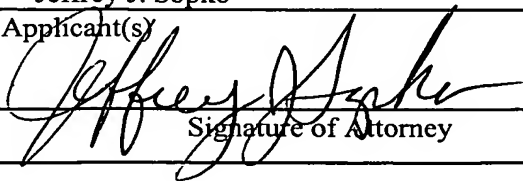  
Signature of Attorney





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

Dated 4 November 2003





-----

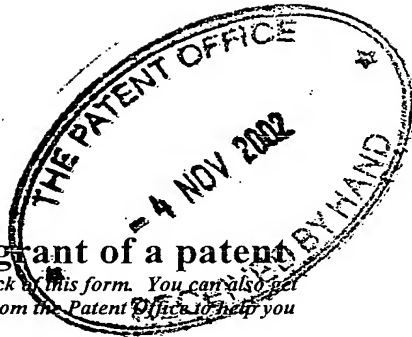

# The Patent Office

05NOV02 E760882-9 D01078  
P01/7700 0.00-0225686.5

1777

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference P505514GB

2. Patent application number  
(The Patent Office will fill in this part)

0225686.5

- 4 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Electrolux Outdoor Products Limited  
Preston Road  
Aycliffe Industrial Park  
Newton Aycliffe  
County Durham  
DL5 6UP  
United Kingdom

6368468001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Trimmer

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s) 3

Abstract 1 *DMC*

Drawing(s) 5 *45*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

*Withers & Rogers*

Signature

Date 4 November 2002

**Withers & Rogers**

12. Name and daytime telephone number of person to contact in the United Kingdom

David M Pratt

020 7663 3500

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

P505514GB

# Trimmer

This invention relates to a grass trimming device which is capable of being switched between at least two alternative configurations which are suitable for grass trimming and edge trimming respectively.

A known grass trimming device (trimmer) comprises a cutting head mounted at one end of a shaft, an operator handle being positioned at the other end of the shaft. The cutting head includes a cutter constituted by a rotatable blade or a rotatable flexible cutting line. The cutting head can be moved relative to the shaft, to position the cutter generally horizontal for grass trimming and generally vertical for edge trimming.

DE-A-3 010 092 describes a known trimmer of this type, the trimmer having a handle that can be moved from a first socket on the cutting head to a second socket on the same head, in order to shift the cutting head from a configuration in which the cutter plane is horizontal for grass trimming to a configuration in which the cutter is vertical for edge trimming. In both configurations of the device, a shaft fitted to the handle is directed upwardly towards the operator. This device suffers from the drawback that changing from one function to the other is difficult, because it is necessary to release and then remove the handle from one socket, and then replace it and lock it into position in the second socket.

EP-A-0 005 540 shows a similar device where the handle is pivotally adjustable in a plane which is perpendicular to the cutting plane. Changing the configuration of this device requires releasing a handle catch, turning the handle through 180°, releasing the cutting head, and then adjusting it to the required angle. Moreover, a relatively complex arrangement of parts is necessary to achieve the changeover. This results in considerable expense, and a risk that the components, which are not totally covered may be damaged by the ingress of dirt and debris.

EP-A-0 296 789 describes a trimmer in which the shaft includes a coupling section to which the cutting head is pivotally attached. The cutting head includes a surface defining a parting plane at which plane the coupling section is coupled to the cutting head. The parting plane, extends laterally with respect to the shaft, so that relative movement at the parting plane between the coupling section and the cutting head is about an axis which is perpendicular to the parting plane and obliquely to the shaft, so that relative movement between the coupling section and the cutting head about the parting plane positions the cutter in grass trimming and edge trimming configurations.

Each of the trimmers described above is relatively easy to operate when in the trimming configuration. However, when in the edging configuration, the user must stand at right-angles to the edge of a lawn being trimmed, and move sideways along that edge as trimming progresses. This is disadvantageous, in that it is difficult to align the cutter accurately with the edge of the lawn (owing to the eye of the user not being in alignment with the lawn edge), and this can lead to a poor edging performance.

The aim of the invention is to provide a trimmer having improved edging capabilities.

The present invention provides a trimmer comprising a cutting head housing a cutter means, and an elongate shaft for supporting the cutting head, the cutting head being connected to the shaft by connection means permitting the cutting head to be positioned with its cutter means either substantially horizontal or substantially vertical without disconnecting the cutting head and the shaft, the shaft having a hand-grippable portion at a position remote from the cutting head, the arrangement being such that the line joining a point within the hand-grippable portion and the connection means is substantially parallel to plane of rotation of the cutter means when the cutter means is substantially vertical.

Advantageously, the connection means is such that the cutter means is movable between the substantially horizontal position and the substantially vertical position by an effective rotation of the cutting head relative to the handle of  $120^\circ$  in one direction or



240° in the other direction. Preferably, the connection means is constituted by a rotatable joint.

In a preferred embodiment, the axis of rotation of the rotatable joint lies substantially at  
5 -45° to the plane of rotation of the cutter means, and lies substantially at 45° to the horizontal when the cutting head is positioned with the cutter means either substantially horizontal or substantially vertical.

Connection means of this nature enables the cutting head to be moved between a  
10 trimming mode (in which the cutter means is substantially horizontal) and an edging mode (in which the cutter means is substantially vertical) by a simple rotation of the cutting head relative to the shaft. A particular advantage of this connection means is that the elongate shaft is generally aligned with a lawn edge in the edging mode, so that the user can carry out an edging operation when positioned behind the cutting head and  
15 moving forwards (or backwards) along the edge portion of the lawn.

Advantageously, the rotatable joint is constituted by a ball-and-socket joint. Preferably, the ball is fixed to the cutting head, and the socket is defined by a generally spherical socket portion formed at the end of the shaft remote from the hand-grippable portion .  
20

The trimmer may further comprise a motor for driving the cutter means. Conveniently, the cutter means is rotatable, and the drive engagement between the motor and the cutter means is a rotatable drive engagement. Preferably, the motor is housed within the ball, and is an electric motor.

25 Preferably, a rotatable cutter line constitutes the cutter means.

In a preferred embodiment, the trimmer further comprises a wheel rotatably mounted on the cutting head. The axis of rotation of the wheel may be substantially coincident with  
30 the axis of rotation of the cutter means. Advantageously, the radius of the wheel is of the order of, but slightly less than, the effective radius of the cutter means.

The invention also provides a cutting head housing a cutter means, and a shaft for supporting the cutting head, the cutting head being adjustably mounted with respect to the shaft by connection means enabling the cutter means to be moved between substantially vertical and substantially horizontal positions by adjusting the position of the cutting head relative to the shaft by an effective rotation of  $120^\circ$  in one direction or  $240^\circ$  in the other direction.

The invention further provides a cutting head housing a cutter means, and a shaft for supporting the cutting head, the cutting head being rotatably mounted with respect to the shaft by means of a rotatable joint whose axis of rotation lies substantially at  $45^\circ$  to the plane rotation of the cutter means, and lies substantially at  $45^\circ$  to the horizontal when the cutting head is positioned with its cutter means either substantially horizontal or substantially vertical.

A trimmer constructed in accordance with the invention will now be described, by way of example, with reference to the drawings, in which:-

Figure 1 is perspective view of the cutting head of the trimmer;

Figure 2 is a side elevation of the trimmer in edging mode;

Figure 3 is a front elevation of the trimmer in edging mode;

Figure 4 is a side elevation of the trimmer in trimming mode; and

Figure 5 is a front elevation of the trimmer in trimming mode.

As shown in the drawings, the trimmer comprises a cutting head 1 which is connected to a shaft 2 by means of a ball-and-socket joint 3. The joint 3 is constituted by a housing 3a, which is integrally formed with the shaft 2, and a ball 3b which is fixed to the cutting head 1. The housing 3a defines a generally spherical socket which complements the shape of the ball 3b. The shaft 2 and the housing 3a are made of a plastics material such as ABS or polypropylene, and the ball 3b is made of a plastics material such as ABS or polypropylene. The cutting head 1 includes a rotatable hub 4 which houses a coiled up flexible cutter line (only the free end of portion 5 of which can be seen in the drawings). The cutter line 5 exits the hub 4 via an aperture 4a, and can be fed out (in known manner) as the cutter line wears. The axis A of rotation of the

joint 3 (see Figure 4) lies at an angle of substantially  $45^\circ$  to the plane of rotation of the cutter line 5.

The cutting head 1 is also provided with a guard 6 made of a plastics material such as ABS or polypropylene. The guard 6 partially surrounds the hub 4 and the cutter line 5 in such a manner that the cutter line has an effective cutting range which extends somewhat less than  $180^\circ$ . The hub 4 is rotatably driven by an electric motor (only the output shaft 7 of which can be seen), the motor being housed within the ball 3b. A wheel 8 made of a plastics material such as ABS or polypropylene is mounted between the guard 6 and the housing 3a, the wheel being rotatable relative to the guard about the axis of the motor shaft 7, and having a radius that is slightly less than the effective radius of the cutter line 5. A hand grip 9 is provided at the free (upper) end of the shaft 2.

Figures 2 and 3 show the trimmer 1 in the edging position, that is to say with the cutting head 1 positioned so that the cutter line 5 is generally vertical. In this position, as shown in Figure 2, the rim of the wheel 8 can be positioned on a lawn adjacent to the edge thereof, so that the cutter line 5 is positioned for an edging operation. The trimmer can then be advanced along the edge of the lawn to carry out the edging operation. As shown in Figure 2, the distance between the effective radius of the cutter line 5 and the radius of the wheel 8 defines the depth of cut (cutting swathe) which can be effected with the trimmer in the edging position. In Figure 2, arrow B indicates the edging direction (that is to say the direction in which the trimmer is moved during edging), arrow C indicates the cutting direction (that is to say the direction of rotation of the cutter line 5), and double-headed arrow D indicates the depth of cut (the cutting swathe) of the cutter line 5.

In order to change the trimmer from its edging mode to its trimming mode, it is necessary only to rotate the cutting head 1 relative to the shaft 2, through either  $120^\circ$  in one direction, or  $240^\circ$  in the other direction. Figures 4 and 5 show the trimmer with the cutting head 1 in the trimming position, that is to say with the cutter line 5 generally horizontal.

One advantage of the 120° or 240° rotational angle necessary to convert between the two modes is that, in the edging mode, the shaft 2 is generally aligned with the edge of the lawn, so that the user can carry out an edging operation when positioned behind the cutting head 1 and moving forwards (or backwards) along the edge of the lawn. This enables the user to line up the cutter line 5 with the edge of the lawn, because the user's eye can be positioned substantially in the plane of the lawn edge. This is to be contrasted with known trimmers, in which the user faces the edge of the lawn when the trimmer is in the edging position, and has to move sideways parallel to the lawn edge to carry out an edging operation. Clearly, in this position, the user cannot line up the cutter line accurately with the lawn edge. A further advantage of the trimmer described above is that, with the trimmer in the edging configuration as shown in Figure 2, the direction of rotation of the cutter line 5 is such as to throw cut grass and debris directly away from the user, that is to say at 180° to the user. This is because the user is positioned "behind" the cutting head. This is to be contrasted with known trimmer/edgers, in which the user stands at substantially 90° to the edge of the lawn (and hence to the plane of rotation of the cutter). Accordingly, there is less chance of the user of the trimmer of the present invention being hit by flying debris than with known devices.

Another advantage of the trimmer described above is that the joint about which the cutting head 1 rotates is low down, thereby reducing the difference in the height of the hand grip 9 when the trimmer is in the edging and trimming modes.

A further advantage of this trimmer is that the wheel 8 which has a relatively large diameter. The trimmer can, therefore, handle uneven lawn surfaces rather better than known wheeled trimmers which typically have a small wheel hanging off the front of the cutting head.

It will be apparent that modifications could be made to the trimmer described above. For example, in order to facilitate two-handed operation, an additional hand grip could be provided at the front of the shaft 2 adjacent to the top thereof.

**Claims**

1. A trimmer comprising a cutting head housing a cutter means, and an elongate shaft for supporting the cutting head, the cutting head being connected to the shaft by connection means permitting the cutting head to be positioned with its cutter means either substantially horizontal or substantially vertical without disconnecting the cutting head and the shaft, the shaft having a hand-grippable portion at a position remote from the cutting head, the arrangement being such that the line joining a point within the hand-grippable portion and the connection means is substantially parallel to plane of rotation of the cutter means when the cutter means is substantially vertical.
2. A trimmer as claimed in claim 1, wherein the connection means is such that the cutter means is movable between the substantially horizontal position and the substantially vertical position by an effective rotation of the cutting head relative to the handle of 120° in one direction or 240° in the other direction.
3. A trimmer as claimed in claim 1 or claim 2, wherein the connection means is constituted by a rotatable joint.
4. A trimmer as claimed in claim 3, wherein the axis of rotation of the rotatable joint lies substantially at 45° to the plane of rotation of the cutter means, and lies substantially at 45° to the horizontal when the cutting head is positioned with the cutter means either substantially horizontal or substantially vertical.
5. A trimmer as claimed in claim 3 or claim 4, wherein the rotatable joint is constituted by a ball-and-socket joint.
6. A trimmer as claimed in claim 5, wherein the ball is fixed to the cutting head, and the socket is defined by a generally spherical socket portion formed at the end of the shaft remote from the hand-grippable portion.


7. A trimmer as claimed in any one of claims 1 to 6, further comprising a motor for driving the cutter means.
8. A trimmer as claimed in claim 7, wherein the cutter means is rotatable, and the drive engagement between the motor and the cutter means is a rotatable drive engagement.
9. A trimmer as claimed in either of claims 7 and 8 when appendant to claim 6, wherein the motor is housed within the ball.
10. A trimmer as claimed in claim 9, wherein the motor is an electric motor.
11. A trimmer as claimed in any one of claims 1 to 10, wherein a rotatable cutter line constitutes the cutter means.
12. A trimmer as claimed in any one of claims 1 to 11, further comprising a wheel rotatably mounted on the cutting head.
13. A trimmer as claimed in claim 12 when appendant to claim 8, wherein the axis of rotation of the wheel is substantially coincident with the axis of rotation of the cutter means.
14. A trimmer as claimed in claim 13, wherein the radius of the wheel is of the order of, but slightly less than, the effective radius of the cutter means.
15. A trimmer comprising a cutting head housing a cutter means, and a shaft for supporting the cutting head, the cutting head being adjustably mounted with respect to the shaft by connection means enabling the cutter means to be moved between substantially vertical and substantially horizontal positions by adjusting the position of the cutting head relative to the shaft by an effective rotation of  $120^\circ$  in one direction or  $240^\circ$  in the other direction.


16. A trimmer comprising a cutting head housing a cutter means, and a shaft for supporting the cutting head, the cutting head being rotatably mounted with respect to the shaft by means of a rotatable joint whose axis of rotation lies substantially at  $45^\circ$  to the plane of rotation of the cutter means, and lies substantially at  $45^\circ$  to the horizontal when the cutting head is positioned with the cutter means either substantially horizontal or substantially vertical.

**Trimmer****Abstract**

5 A trimmer comprises a cutting head (1) housing a cutter (5), and an elongate shaft (2) for supporting the cutting head. The cutting head (1) is connected to the shaft (2) by connection means (3) permitting the cutting head (1) to be positioned with the cutter (5) either substantially horizontal or substantially vertical. The connection means (3) is such that, when the cutter (5) is substantially vertical, the longitudinal axis of the shaft (2) is parallel to the plane of rotation of the cutter.



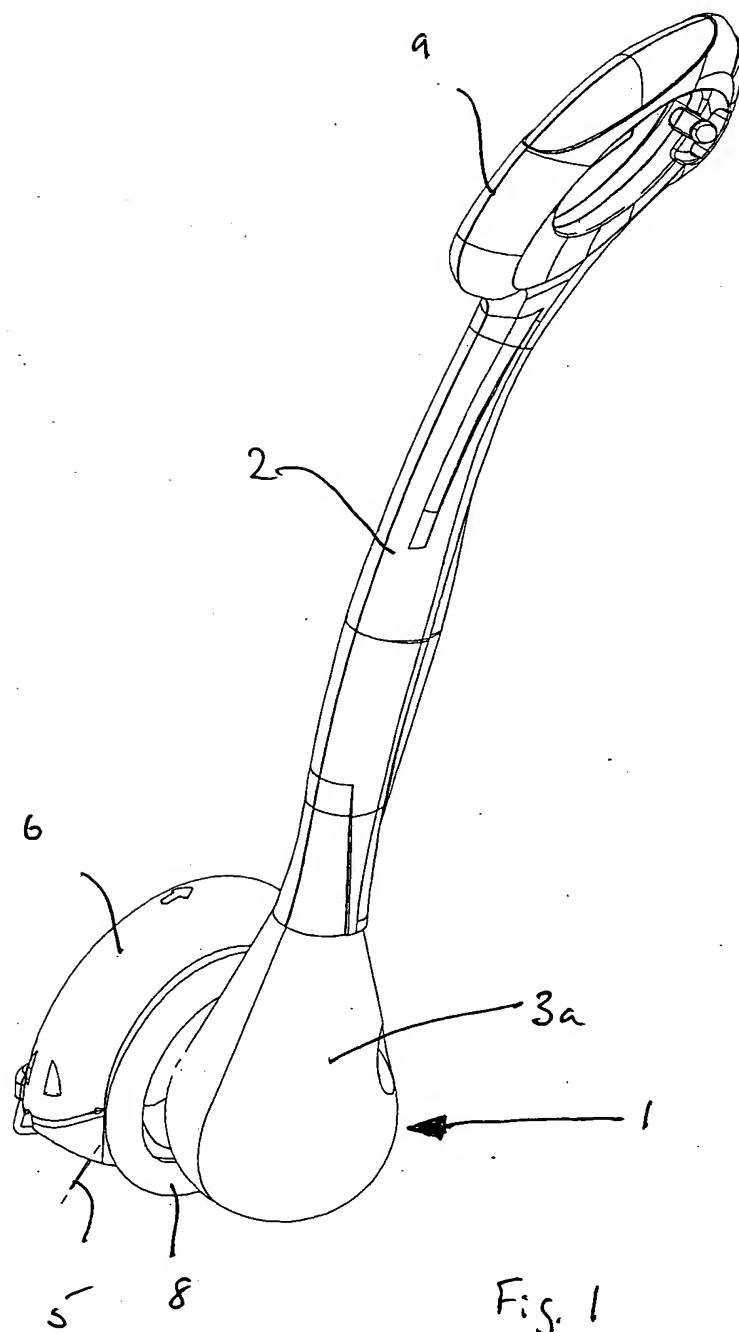

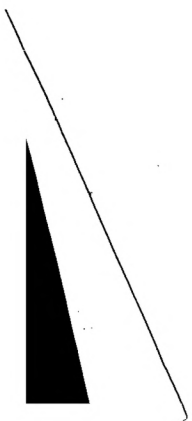

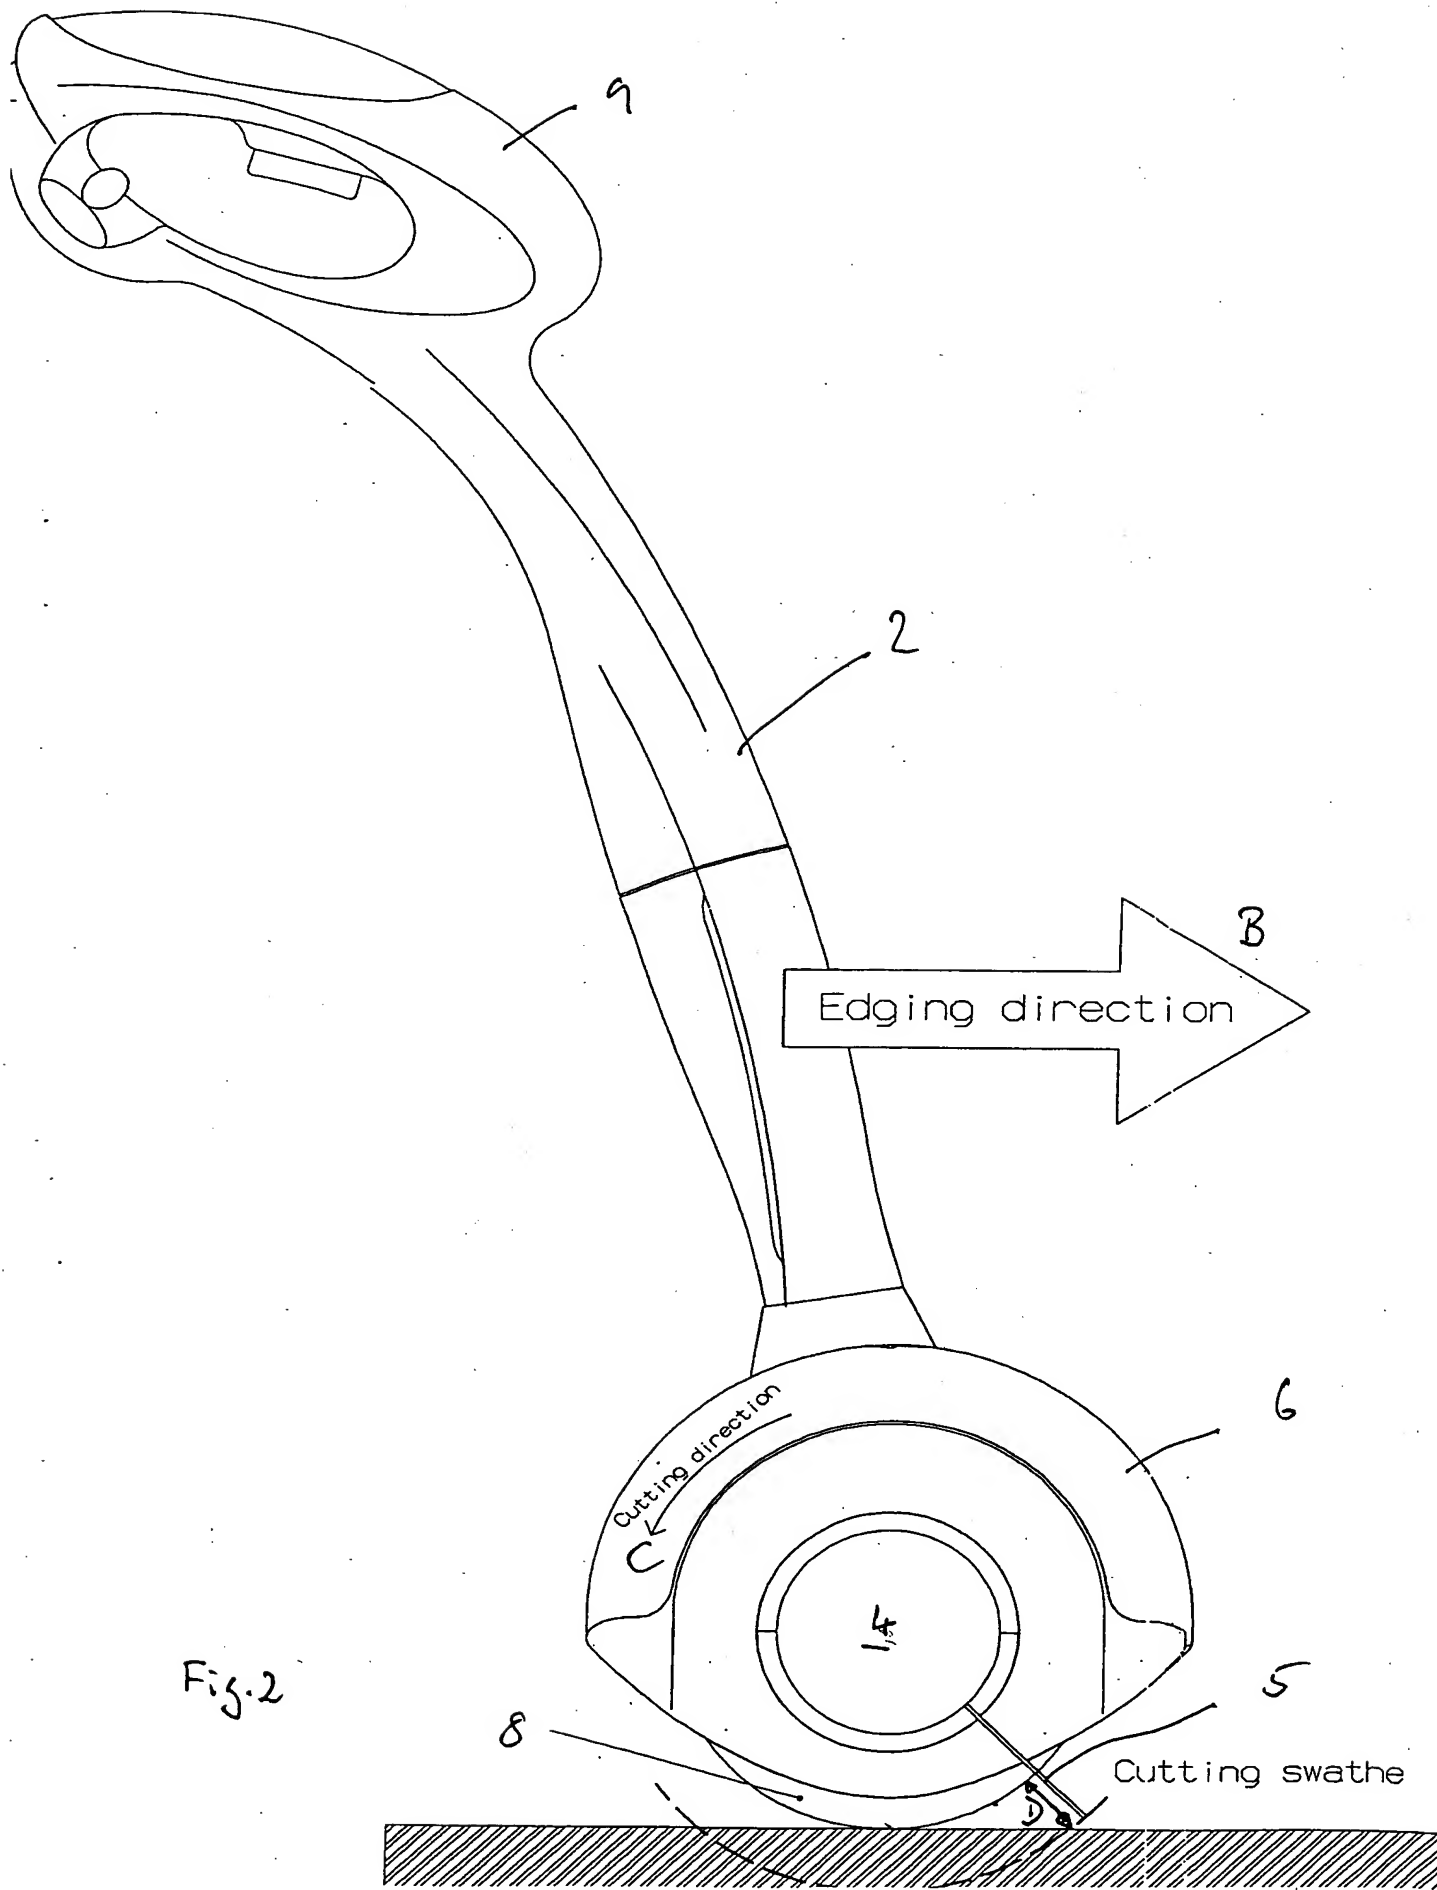
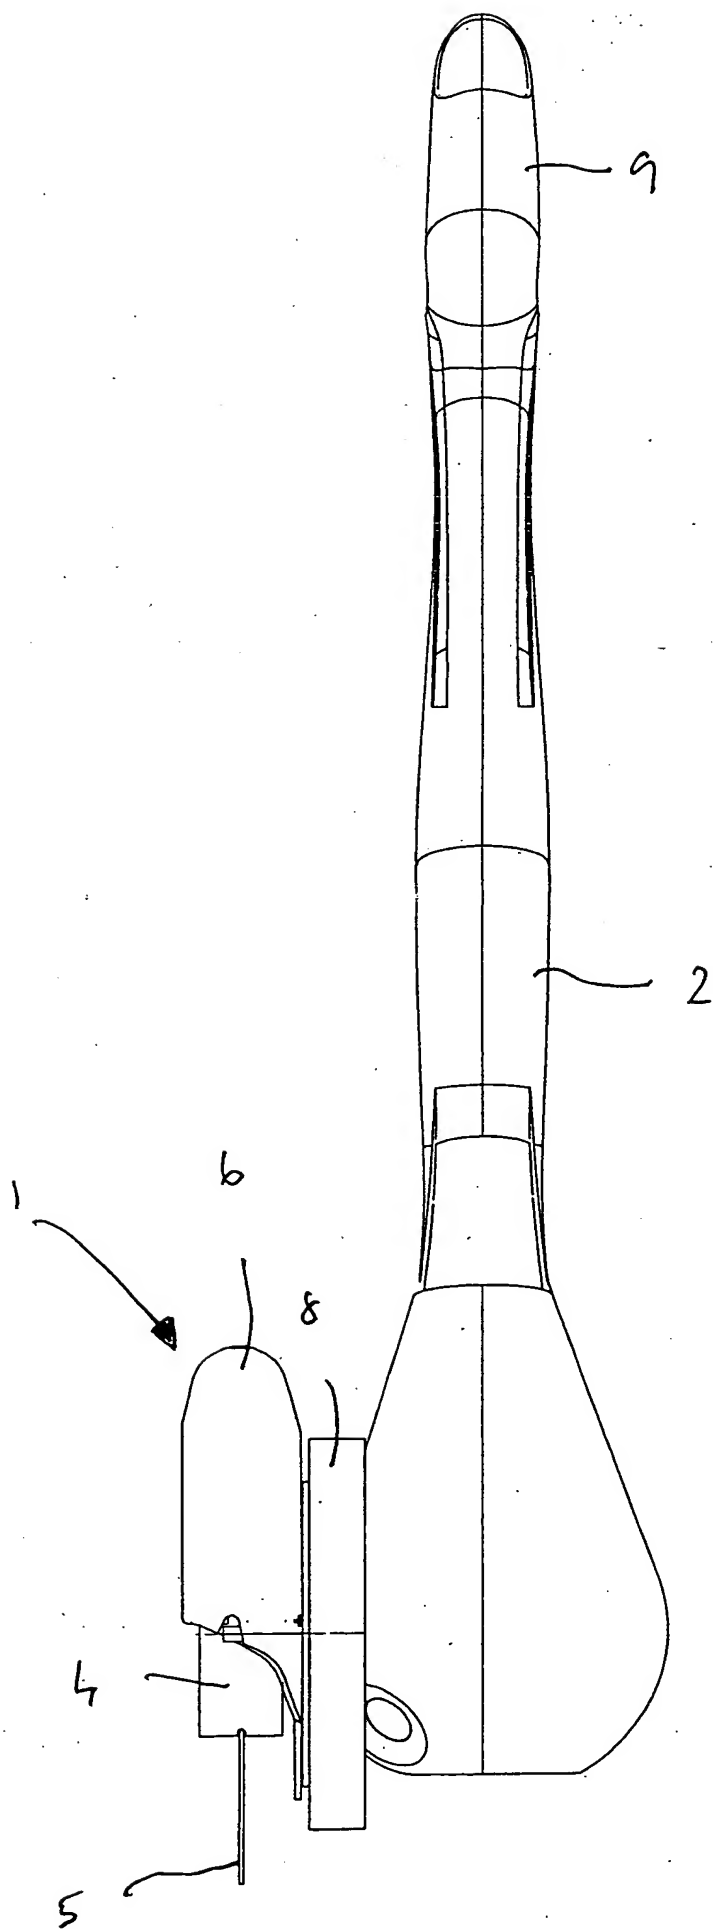


Fig. 2



Fig. 3






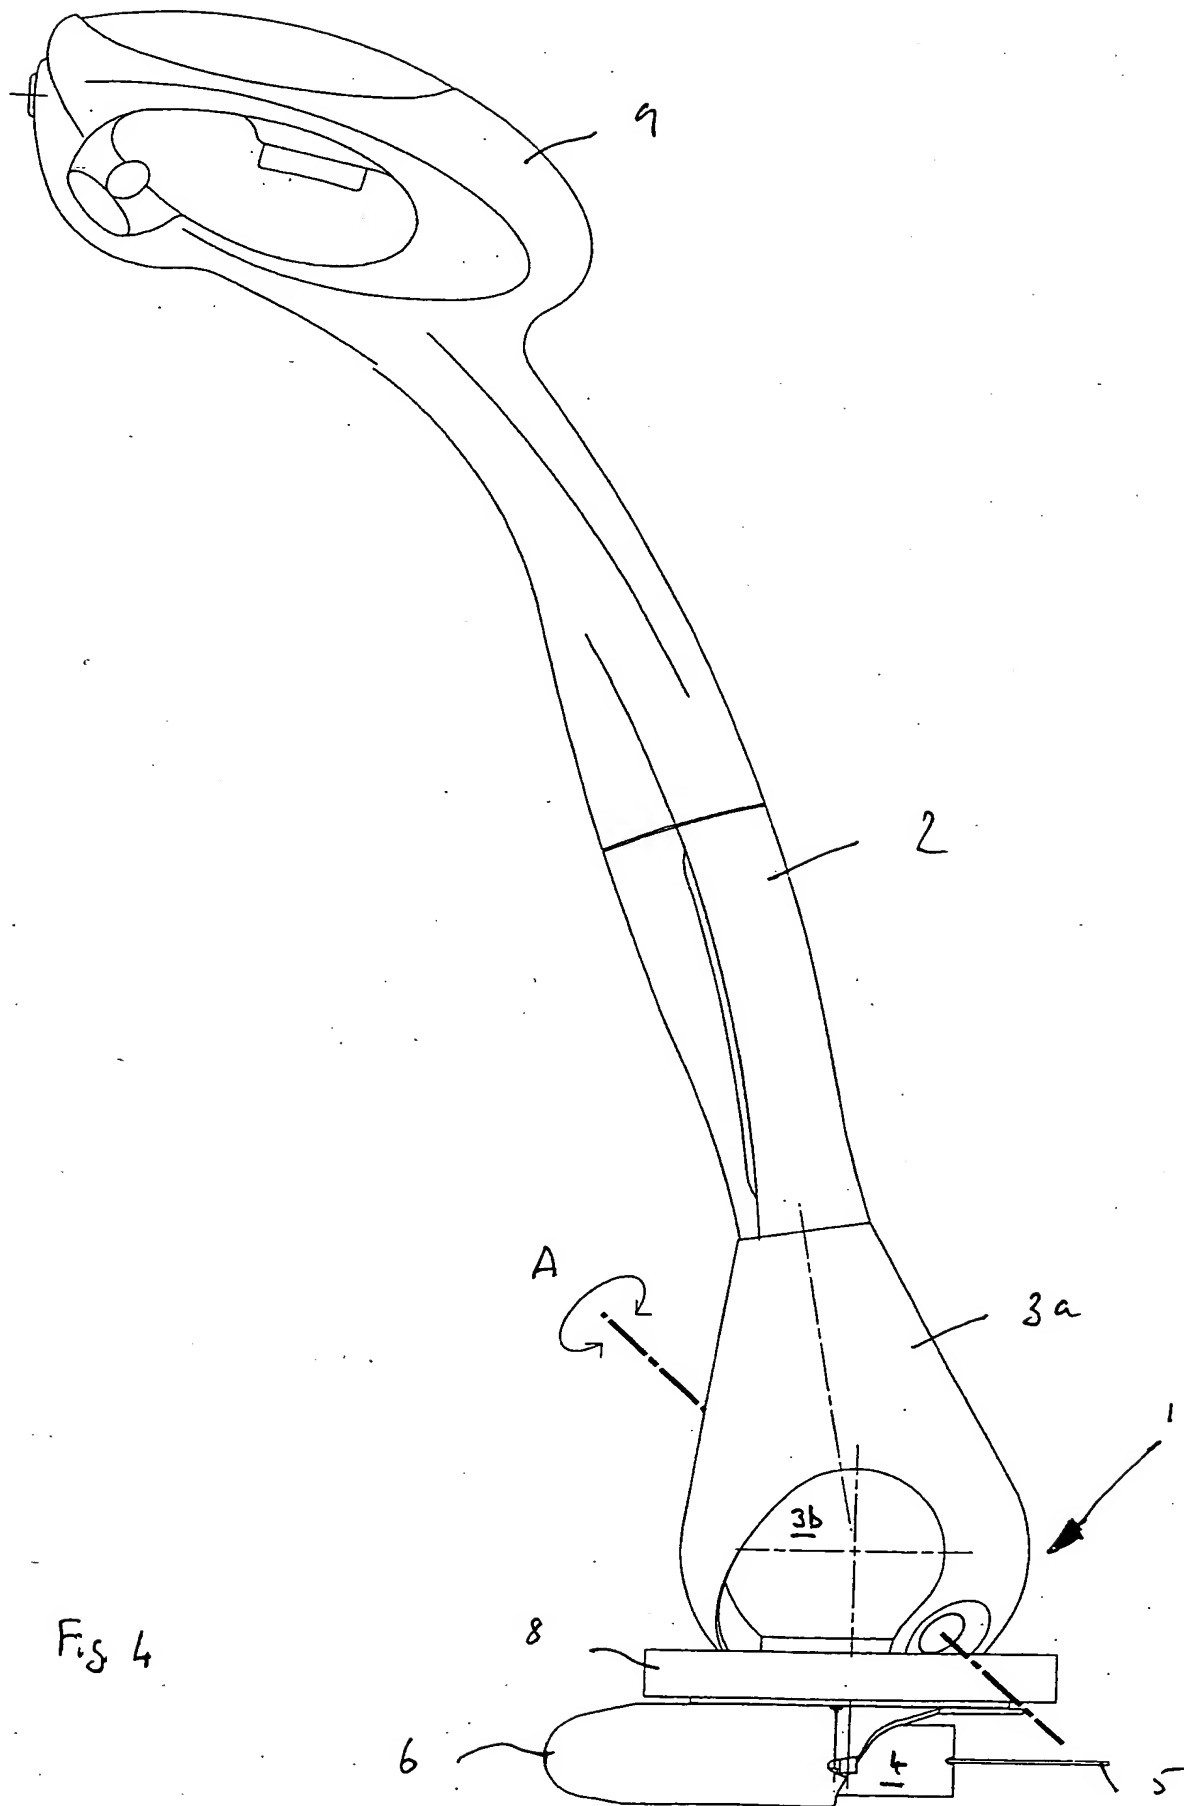


Fig 4





Fig. 5

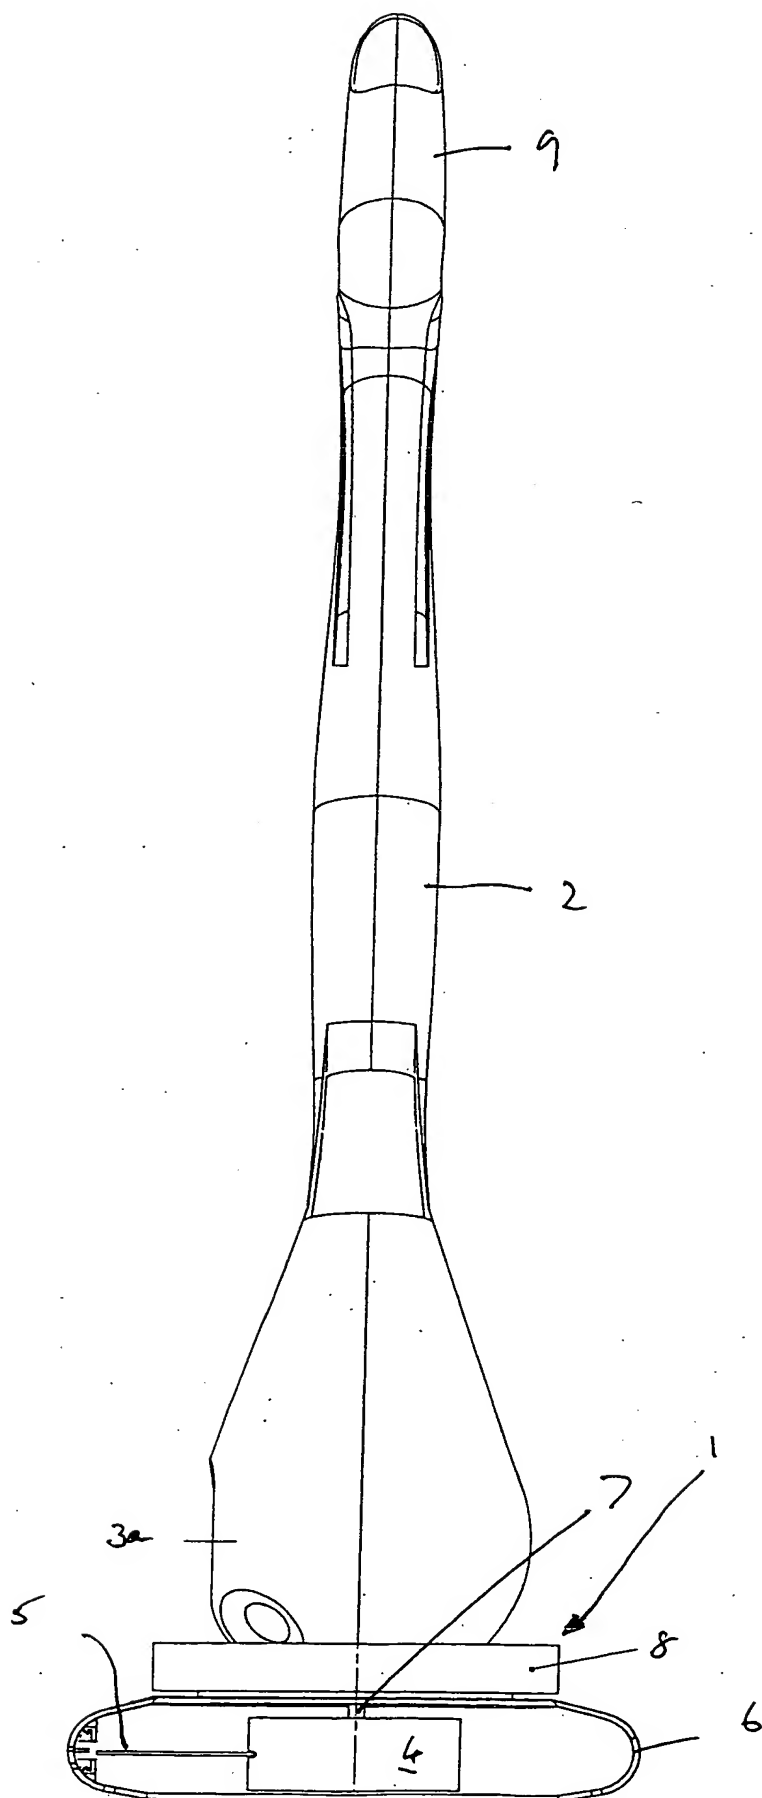

WHR 36245